

HAZARDOUS LOCATION CLASS 1 DIV 2 & CLASS 2 DIV 2 Fixture

IR7-4-4-26-UNV-T8 4 Lamp T8

IR7-4-3-26-UNV-T8 3 Lamp T8

IR7-4-4-46-UNV-T5HO 4 Lamp T5

IR7-4-3-46-UNV-T5HO 3 Lamp T5

4-FT., 3&4 LAMP, T8 (32-watt), FLUORESCENT HAZARDOUS LOCATION FIXTURE

4-FT., 3&4 LAMP, T5HO (54 watt), FLUORESCENT HAZARDOUS LOCATION FIXTURE



FIXTURE FEATURES

Intended Use

Intended for hazardous location applications:

- Class I, Div. 2-Groups A, B, C, D
- Class 2, Div 2 – Groups FG

Typical applications include: Chemical Plants, Water Treatment Plants, Coal and Dust Storage, Inspection Sanding, Paint Areas, Wet Locations.

Construction

- 18 gauge steel housing with white powder coating. Hinged ballast entry. Front Access.
- Hinged Front Door. Zinc latches, 3/16 tempered glass.

Ballast

Energy efficient, 120-277 multi-volt, electronic, automatic resetting, program start (T5HO) and instant start (T8) ballasts are standard in all fixtures. (Indicate EM) for emergency ballasts.

Listings

UL 1958 US and Canada

UL 844 – Class I, Div 2, A,B,C,D

Approximate Fixture Dimensions & Weights

Length: 51 ½ "

Width: 15 5/8 "

Height: 6 ¼ "

Weight: 40 lbs

Mounting

Fixture can be surface mounted or suspended.

Warranty

Fixture is warranted for five years from delivery date against manufacturing defects. Ballast warranty is provided through the ballast manufacturer.

Options

- Adjustable Surface Mount
- Cable Mount
- Chain Mount
- Adjustable Brackets

HAZARDOUS LOCATION CLASS 1 DIV 2 & CLASS 2 DIV 2 Fixture

IR7-4-4-26-UNV-T8 4 Lamp T8


IR7-4-3-26-UNV-T8 3 Lamp T8

IR7-4-4-46-UNV-T5HO 4 Lamp T5

IR7-4-3-46-UNV-T5HO 3 Lamp T5

Mounting Options- Chain

Primary mounting option is from the end brackets with chain.

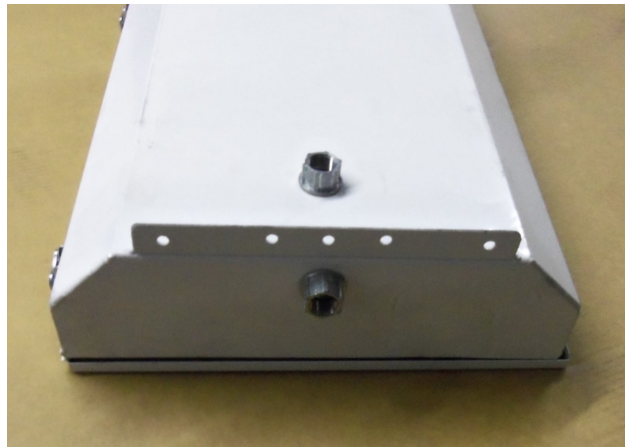

Mounting Options- Bracket or surface mounting 7 1/2 inches

